


Technical Data

DB 75	
Product Type	Compact Box PC
General characteristics	
Processor	Intel® Celeron, 2,6GHz, FSB 400MHz ; Socket 478, Intel® Pentium 4, 2,4 GHz, FSB 533 MHz; Socket 478,
Chipset	Intel® FW82845GV GMCH/FW82801DB ICH4
Memory	256MB to 2GB DDR SDRAM
Expansion slots	3 PCI-Slot (1 x AGP shared)
Operating systems	Microsoft Windows 2000/XP, Linux, NT 4.0
Power Supply	90 - 264 VAC, overload protection, short circuit protection, over voltage protection 24VDC optional
Nominal Power	300 W active PFC, efficiency ≥ 75 %
Guarantee	24 Months ¹
Drives	
Mass Memory	2,5" HDD at 60 GB (optional RAID system)
Optical Drives	CD-Rom or optional DVD/CD-RW drive, rear side operation
Additional Drives	Floppy, rear side operation
Interfaces	
LAN/Ethernet	1 x RJ45 / IEEE 802.3 compatible , Realtek RTL8101L
USB	6 x USB 2.0 (2 x ext., 4 x int.)
Serial Interface	2 x RS232 (1 x ext., 1 x int.)
Parallel Interface	1 x LPT1 (EPP/ECP)
Keyboard/Mouse	2 x PS/2
Video	1 x VGA / Intel® Extreme Graphics controller
Multimedia	Mic in, Line in, CD Audio in, Line out / Intel® ICH4
Watchdog Functions	
CPU Temperature	Surveillance onboard
Fan rotation	Surveillance onboard
Ambient Conditions	
Vibration resistance	0,67G (5-500Mhz)
Shock resistance	300G/2ms
EMC	EN 55011, 55022, 500081
Temperature	+5°C to +45°C max.
Relative humidity	5% to 80% at 25°C (no humidity/condense)
Authorization	CE
Mechanical Characteristics	
PC Unit	Powder coated, EMC proofed

¹ warranty ex works, normally 24 months, fixed at order.
All data refer on print date, errors and changes excepted



Dimensions [mm]	
a:	368
b:	289
c:	165
Weight	ca. 7 kg

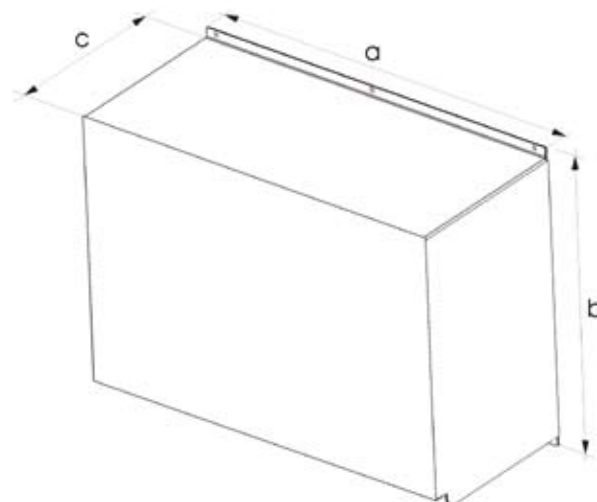

Highlights

- Long term availability
- 4 Slots
- High Performance
- High configuration flexibility
- High grade industrial components
- LookIn Display available



DB 75 Configuration

	1	2	3	4	5	6	7	8
Monitor								
no configuration								
LookIn Display								
Processor								
Celeron 2,6 GHz, P4 Board 3 PCI Slots								
Pentium 4 2,4 GHz, P4 Board 3 PCI Slots								
Memory								
256 MB								
512 MB								
1 GB								
2 GB								
Drives								
CD ROM, slim Drive								
COMBO DVD/CD ROM R/W, slim Drive								
Storage								
2.5" no FD Drive, standard configuration								
2.5" with FD Drive, option								
Power								
110/230 VAC, auto-switch								
24VDC, option								
Front								
no configuration								
Operating system								
Microsoft Windows 2000 Prof. MUI								
Microsoft Windows XP Prof. MUI								
Microsoft Windows NT 4.0								
Preinstalled LINUX								
No operating System								

Your order code: **DB 75**



LookIn Display is situated on the front of the box and allows to check the status and control the settings of your DIVUS BOX PC. View CPU performance, change IP settings and more on the fly without a monitor, keyboard or mouse attached.